


The CP-6408E is available for the control of multiple sources to eight destinations. The LED displays provide a visible readout of the current source status. The large keypad and eight character displays provide great flexibility to

name sources and destinations in larger systems. Flexible architecture permits any key to be programmed to provide any function.

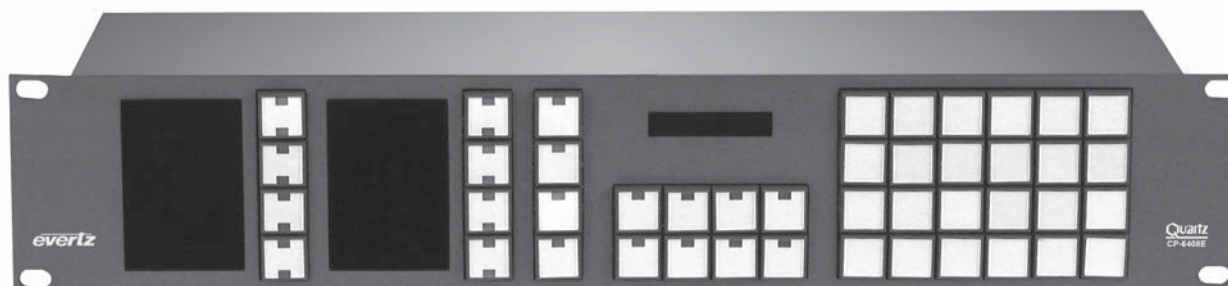

►Features & Benefits

- 24 button keypad
- TAKE button for each destination
- In use display for each destination for easy identification of status
- Eight character names on high brightness green LED displays
- All buttons are fully programmable for different functions
- Preset and in use displays to help avoid false selections
- LOCK button can be assigned to protect against accidental or unauthorized selections
- Previous and LAST buttons can be assigned to scan the available sources and destinations
- Camera joystick override on any eight inputs, with momentary and latching action
- Supports Qlink for legacy router control. Directly connects to most Evertz® routers for simple router control. Contact factory to ensure support.
- Supports Ethernet for connection to MAGNUM Router Control system (Please contact the Factory to obtain a list of Routers which can support Ethernet panels directly)

►Specifications

Control:		Electrical:		Desk Top Mounting (Optional):	
Joystick:	8 Parallel contact closures, TTL levels (GPI) D9 male	Voltage:	Auto ranging, 100 ↔ 240 VAC, 50/60 Hz or 12 VDC, 3A	Panel Depth:	1.4" (35mm)
Qlink:	75Ω coaxial connection for direct connection to routers BNC, "T" adapter and termination required	Power:	40W	Chassis Depth:	3.5" (89mm)
Ethernet:	Standard Ethernet interface for connection to MAGNUM Router Control system. RJ45. (Please contact the Factory to obtain a list of Routers which can support Ethernet panels directly)	Fuse Rating:	250V, 1A, time delay	Distance from Panel to Chassis:	40" (1m)
		Physical:		Compliance:	
		Height:	3.5" (89mm) 2RU standard rack height	Safety:	TüV listed, complies with EU safety directives
		Width:	19" (483mm) rack mount	EMI/RFI:	Complies with FCC Part 15 Class A regulations
		Depth:	3.5" (89mm) not including connectors		Complies with EU EMC directive
		Weight:	4lbs (1.81kg)		
		Operating Temp.:	0-40°C		

►Ordering Information

Note: The part numbers refer to the hardware only. Precise operation is determined by the configuration of the control panel.

CP-6408E Control Panel, 2RU Eight Destination, XY Keypad with Displays

Ordering Options

+2PS Redundant Power Supply

Accessories

CP-6408E-DMK Desk Mount Kit for CP-6408E